




TUBE L

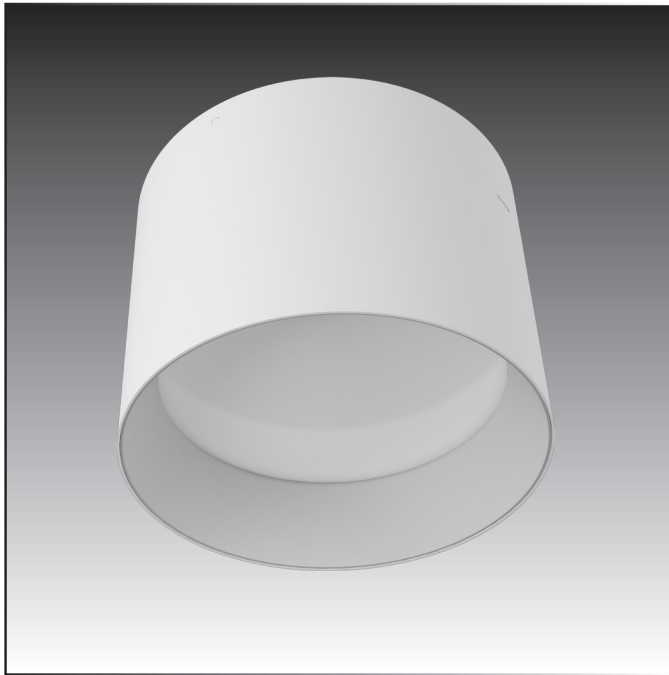


TUBE L is a luminaire for ceiling mounting. The model is complete with PHILIPS LED module and driver. A wide range of internal applications for offices, shops, hotels, schools, conference halls, restaurants and others. Suitable for replacement of downlights with PLL

PRODUCT DESCRIPTION:

- LED module efficiency: > 140lm / W
- LED module luminous flux 1100lm, 2000lm or 3000lm.
- High color rendering CRI > 80.
- Dimmable DALI or 1-10V
- Optional-emergency unit
- Protection IP21
- Long life: 50,000 hours
- Body: metal
- Reflector: aluminum
- Warranty: 5 years

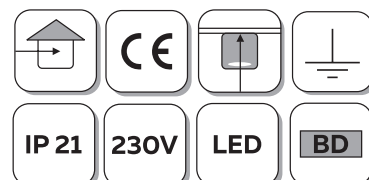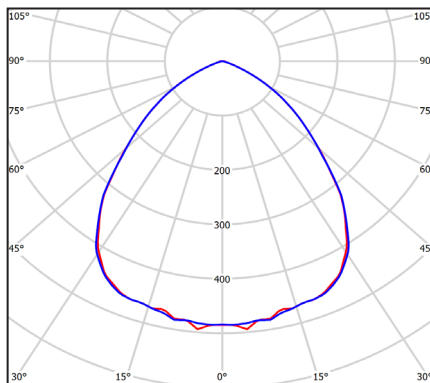

TUBE L AA2721

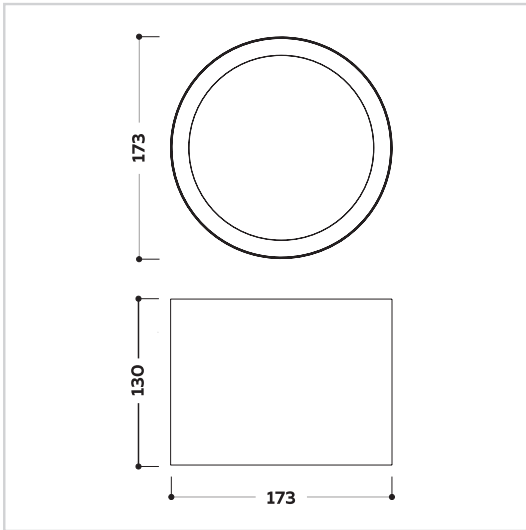

DIMENSIONS:

AA2721 173xH130mm

CONFIGURATION REF. = A+B+C
example: AA2721 11E830-W-TD

A

REF.	Dimension L/W/H	Power W	Luminous flux Lm	Color temperature K	Efficiency Lm/W	CRI	LED module and driver
AA2721 11E830...	173x130mm	10.0 W	1100 Lm	3000 K	110 Lm/W	>80	PHILIPS
AA2721 11E840...	173x130mm	9.0 W	1100 Lm	4000 K	122 Lm/W	>80	PHILIPS
AA2721 20E830...	173x130mm	17.0 W	2000 Lm	3000 K	118 Lm/W	>80	PHILIPS
AA2721 20E840...	173x130mm	16.0 W	2000 Lm	4000 K	125 Lm/W	>80	PHILIPS
AA2721 30E830...	173x130mm	25.0 W	3000 Lm	3000 K	120 Lm/W	>80	PHILIPS
AA2721 30E840...	173x130mm	23.0 W	3000 Lm	4000 K	130 Lm/W	>80	PHILIPS

Operation Lifetime: 50000h

B

COLOR

WHITE	.W
GRAY	.GR
BLACK	.BK
OTHER RAL COLORS	ON REQUEST

C

DIMMABLE

DALI	.TD
------	-----