




TRIX SF

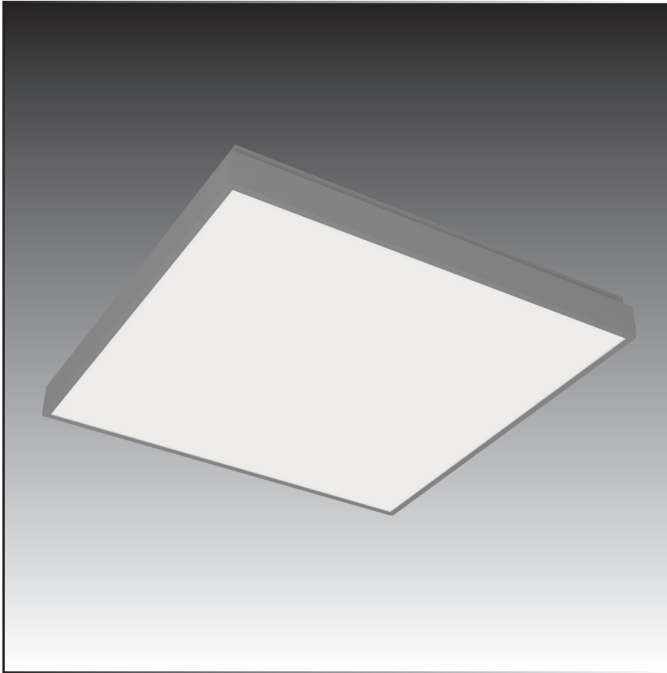


TRIX SF are lighting fixtures for ceiling installation. The models are completed with LED modules and PHILIPS drivers. Wide range of indoor applications for offices, shops, schools, conference rooms, and more. Suitable for replacement of standard luminaires with fluorescent lamps.

PRODUCT DESCRIPTION:

- LED module efficiency: > 165lm / W
- Luminous flux (Lm) can change in a diferent range other than the indicated- on request
- High color rendering CRI > 80.
- Option-dimmable DALI
- Option-emergency unit
- Protection IP21
- Long life: 50,000 hours
- Body: aluminum
- Diffuser: polycarbonate opal
- Warranty: 5 years

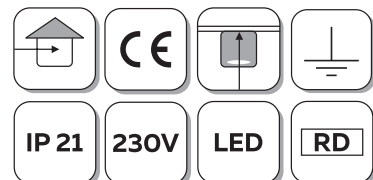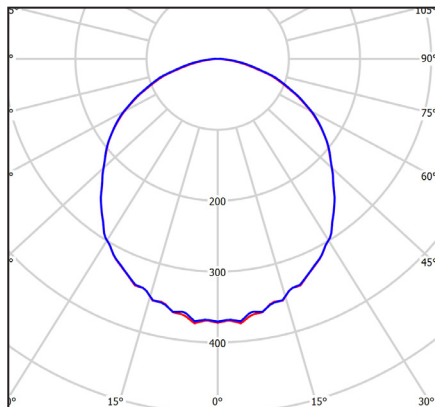

TRIX SF AA0911

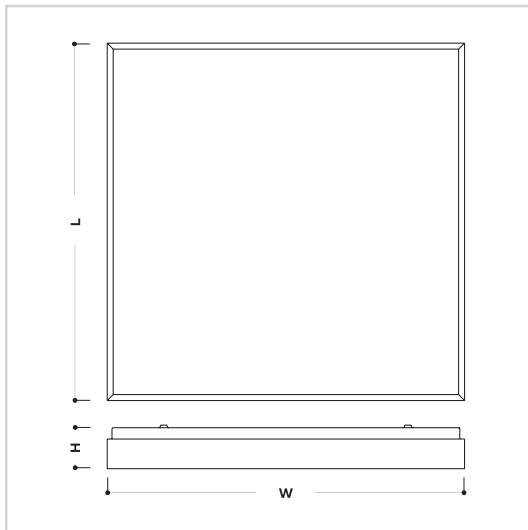

DIMENSIONS:

- AA0911** 600x600xH73mm
- AA3239** 850x850xH73mm
- AA3241** 310x1120xH73mm
- AA3242** 310x1665xH73mm

CONFIGURATION REF. = A+B+C+D
example: AA0911 44E830-W-TD-EA1

A

REF.	Dimension L/W/H	Power W	Luminous flux Lm	Color temperature K	Efficiency Lm/W	CRI	LED module and driver
AA0911 50E830	L600xW600xH73mm	32 W	3758 Lm	3000 K	119 Lm/W	>80	PHILIPS
AA0911 50E840	L600xW600xH73mm	32 W	4000 Lm	4000 K	127 Lm/W	>80	PHILIPS
AA3239 110E830	L850xW850xH73mm	70.0 W	8443 Lm	3000 K	121 Lm/W	>80	PHILIPS
AA3239 110E840	L850xW850xH73mm	70.0 W	9013 Lm	4000 K	129 Lm/W	>80	PHILIPS
AA3241 37E830	L310xW1120xH73mm	32 W	3758 Lm	3000 K	119 Lm/W	>80	PHILIPS
AA3241 37E840	L310xW1120xH73mm	32 W	4000 Lm	4000 K	127 Lm/W	>80	PHILIPS
AA3242 70E830	L310xW1665xH73mm	46.0 W	5637 Lm	3000 K	123 Lm/W	>80	PHILIPS
AA3242 70E840	L310xW1665xH73mm	46.0 W	6000 Lm	4000 K	130 Lm/W	>80	PHILIPS

Operation Lifetime: 50000h

B

COLOR

WHITE	.W
OTHER RAL COLORS	ON REQUEST

C

DIMMABLE

DALI	.TD
1-10V	.D1-10



D

EMERGENCY

1h	.EA1
3h	.EA3

TRIX SF **AA3239**

DIMENSIONS: 850x850xH73mm

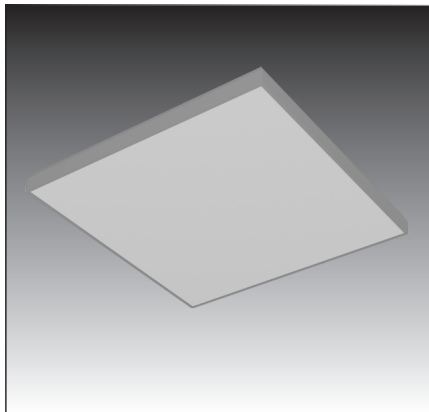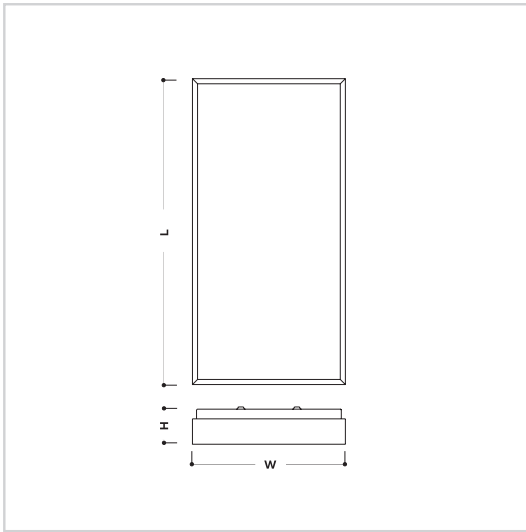

TRIX SF **AA3241** TRIX SF **AA3242**

DIMENSIONS: **AA3241** 310x1120xH73mm
AA3242 310x1665xH73mm

