


CIRCLE PN

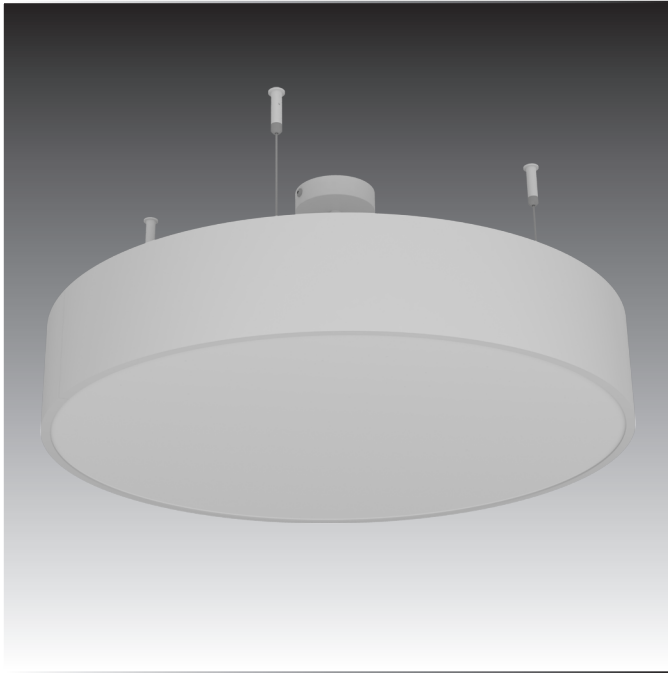

CIRCLE PN are lighting fixtures for mounting in a pendant ceiling.

The model is complete with LED modules and drivers PHILIPS. A wide range of indoor applications for offices, shops, schools, conference rooms and more.

PRODUCT DESCRIPTION:

Efficiency of LED module: over 130 lm / W

The light flux (Lm) can be changed in a range other than the one specified - on request

High CRI color rendering > 90. For CRI > 80 on request

Option: Dimmable DALI or 1-10V

Option: Emergency Module



Degree of protection: IP21

Long life: 50,000 hours


Body: Aluminium

Difuzer: polycarbonate opal

Warranty: 5 years

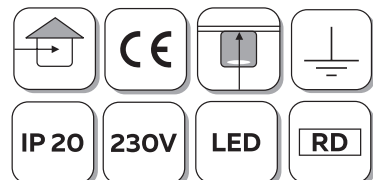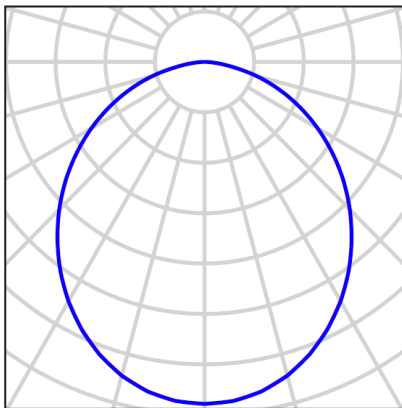

CIRCLE PN

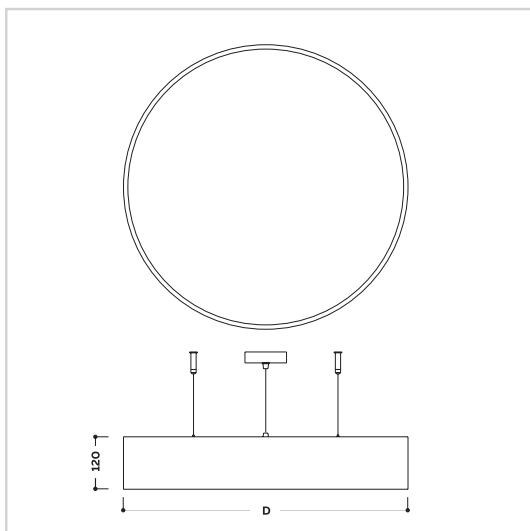

DIMENSIONS:

AA3506 630xH120mm
AA3507 800xH120mm
AA3508 1250xH120mm

CONFIGURATION REF. = A+B+C

example: AA3506 F88E930-W-TD

A

| REF. | Dimensions D/H | Power W | Luminous flux Lm | Color temperature K | Efficiency Lm/W | CRI | LED module and driver |
|-----------------|----------------|---------|------------------|---------------------|-----------------|-----|-----------------------|
| AA3506 F88E930 | 630X120mm | 63.0 W | 5900 Lm | 3000 K | 94 Lm/W | >90 | PHILIPS |
| AA3506 F88E940 | 630X120mm | 63.0 W | 6200 Lm | 4000 K | 98 Lm/W | >90 | PHILIPS |
| AA3507 F98E930 | 800X120mm | 98.0 W | 9285 Lm | 3000 K | 95 Lm/W | >90 | PHILIPS |
| AA3507 F98E940 | 800X120mm | 98.0 W | 9783 Lm | 4000 K | 100 Lm/W | >90 | PHILIPS |
| AA3508 F286E930 | 1250X120mm | 285.0 W | 27176 Lm | 3000 K | 95 Lm/W | >90 | PHILIPS |
| AA3508 F286E940 | 1250X120mm | 285.0 W | 28631 Lm | 4000 K | 100 Lm/W | >90 | PHILIPS |

Operation Lifetime: 50000h

B

COLOR

| | |
|------------------|------------|
| WHITE | .W |
| GRAY | .GR |
| BLACK | .BK |
| OTHER RAL COLORS | ON REQUEST |

C

DIMMABLE

| | |
|-------|--------|
| DALI | .TD |
| 1-10V | .D1-10 |