


5 warranty
YEARS | Click system

INSERT **SL** 3R AA3890

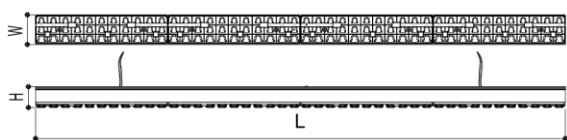

Product description:

- LED luminaire efficiency: > 130lm /W. Luminous flux (Lm) can change in a different range other than the indicated - on request;
- High color rendering CRI> 90;
- Option for dimming;
- Option for Emergency kit 3h;
- Protection IP21;
- IP65 on request
- Long life: 60 000 hours;
- Body: aluminum;
- Block lenses: PMMA;
- Warranty: 5 years;

DIMENSIONS: AA3890 1150x64x45mm

CONFIGURATION REF.= A+B+C+D

example: AA3890 62E830-W-TD-90

A INSERT SMART LINE 3R

| REF. № | Dimensions L/W/H | Power W | Luminous flux Lm | Color temperature K | Efficiency Lm/W | CRI | LED module and driver |
|-------------------|------------------|---------|------------------|---------------------|-----------------|-----|-----------------------|
| AA3890 62E830 | 1150x64x45mm | 46 W | 6200 Lm | 3000 K | 135 Lm/W | >90 | PHILIPS |
| AA3890 62E840 | 1150x64x45mm | 44 W | 6200 Lm | 4000 K | 141 Lm/W | >90 | PHILIPS |
| AA3890 100E830 HF | 1150x64x45mm | 78 W | 10328 Lm | 3000 K | 132 Lm/W | >80 | PHILIPS |
| AA3890 100E840 HF | 1150x64x45mm | 78 W | 10860 Lm | 4000 K | 139 Lm/W | >80 | PHILIPS |

B COLORS

| | |
|------------------|------------|
| WHITE | .W |
| GRAY | .GR |
| BLACK | .BK |
| OTHER RAL COLORS | ON REQUEST |

C OPTIONS

| | |
|--------|-----|
| ON/OFF | .E |
| DALI | .TD |
| EM | 3h |


5 warranty
YEARS | Click system

INSERT **SL** 3R AA3890


CONFIGURATION REF.= A+B+C+D

example: AA3890 62E830-W-TD-90


D LIGHT DISTRIBUTION




90




60



30



25A



25S