


5 warranty
YEARS | Click system

INSERT SL LINDA AA4230

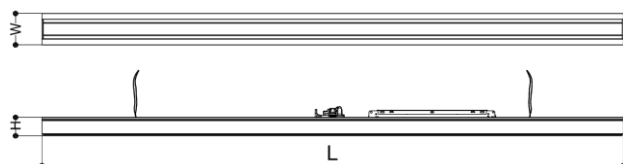

Product description:

- LED luminaire efficiency: > 120lm /W. Luminous flux (Lm) can change in a different range other than the indicated - on request;
- High color rendering CRI> 90;
- Option for dimming;
- Option for Emergency kit 3h;
- Protection IP21;
- Long life: 60 000 hours;
- Body: aluminum;
- Diffuser: PMMA (micro prismatic);
- Warranty: 5 years;

DIMENSIONS: AA4230 1145x64x59mm

CONFIGURATION REF.= A+B+C+D

example: AA4230 35E930-W-TD-WW2

A INSERT SL LINDA

REF. №	Dimensions L/W/H	Power W	Luminous flux Lm	Color temperature K	Efficiency Lm/W	CRI	LED module and driver
AA4230 35E930	1145x64x59mm	30 W	3518 Lm	3000 K	119 Lm/W	>90	PHILIPS
AA4230 35E940	1145x64x59mm	28 W	3520 Lm	4000 K	126 Lm/W	>90	PHILIPS
AA4230 64E830 HF	1145x64x59mm	53 W	6400 Lm	3000 K	121 Lm/W	>80	PHILIPS
AA4230 64E840 HF	1145x64x59mm	50 W	6400 Lm	4000 K	128 Lm/W	>80	PHILIPS

B COLORS

WHITE	.W
GRAY	.GR
BLACK	.BK
OTHER RAL COLORS	ON REQUEST

C OPTIONS

ON/OFF	.E
DALI	.TD
EM	3h

5
YEARS

warranty

Click system




INSERT SL LINDA AA4230


CONFIGURATION REF.= A+B+C+D

example: AA4230 35E930-W-TD-WW2


D LIGHT DISTRIBUTION




WW2




W60



WWW



Z2T25



ZT25