

**5** | warranty  
**YEARS**

## CPH LED PANEL





CPH LED PANEL are suited for general illumination and office lighting. The models are completed with LED modules and PHILIPS drivers. There is wide range of indoor applications for offices, shops, schools, conference rooms, and more. Suitable for replacement of standard luminaires with fluorescent lamps.

### Product description:


- LED module efficiency: > 90lm /W
- Luminous flux (Lm) can change in a different range other than the indicated- on request
- High color rendering CRI> 80
- CCT: 3000K and 4000K, 6500K - on request;
- Dimmable;
- Protection IP21;
- Long life: > 30000h;
- Body: aluminum;
- Diffuser: PMMA;
- UGR < 19;
- Warranty: 3 years;

## CPH LED PANEL

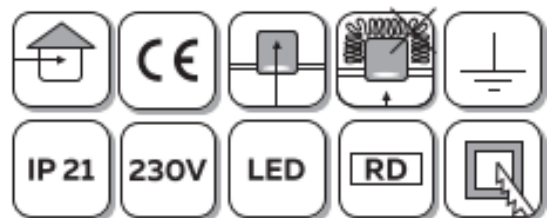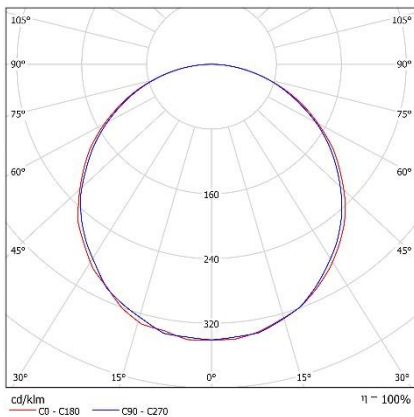

**5** | warranty  
YEARS

## CPH LED PANEL

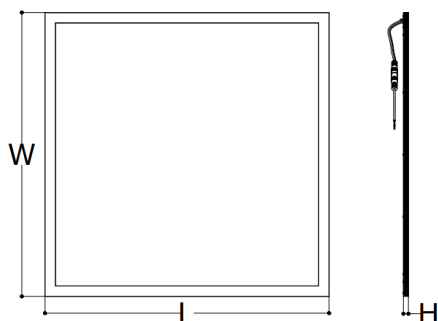

### DIMENSIONS:

**CPH6060** 595x595x10,5mm

**CPH30120** 295x1195x10,5mm

**CPH60120** 595x1195x10,5mm

### CONFIGURATION REF.= A+B+C

example: CPH6060 28E830-W-TD

## A CPH LED PANEL

REF.No	Dimensions L/W/H	Power, W	Luminous flux, Lm	Color temperature K	Efficiency Lm/W	CRI	LED module and driver
CPH6060 22E830	595x595x10,5mm	21 W	2210 Lm	3000 K	105 Lm/W	>80	PHILIPS
CPH6060 22E840	595x595x10,5mm	24 W	2210 Lm	4000 K	117 Lm/W	>80	PHILIPS
CPH6060 35E830	595x595x10,5mm	42 W	3590 Lm	3000 K	86 Lm/W	>80	PHILIPS
CPH6060 35E840	595x595x10,5mm	39 W	3590 Lm	4000 K	92 Lm/W	>80	PHILIPS
CPH30120 22E830	295x1195x10,5mm	21 W	2210 Lm	3000 K	105 Lm/W	>80	PHILIPS
CPH30120 22E840	295x1195x10,5mm	19 W	2210 Lm	4000 K	117 Lm/W	>80	PHILIPS
CPH30120 36E830	295x1195x10,5mm	42 W	3590 Lm	3000 K	86 Lm/W	>80	PHILIPS
CPH30120 36E840	295x1195x10,5mm	39 W	3590 Lm	4000 K	92 Lm/W	>80	PHILIPS
CPH60120 45E830	595x1195x10,5mm	45 W	4550 Lm	3000 K	100 Lm/W	>80	PHILIPS
CPH60120 49E840	595x1195x10,5mm	42 W	4900 Lm	4000 K	107 Lm/W	>80	PHILIPS

## B COLORS

WHITE	.W
-------	----

## C DIMMABLE

DALI	.TD
------	-----