

5 | warranty
YEARS

FPH LED PANEL





FPH LED PANEL are suited for general illumination and office lighting. The models are completed with LED modules and PHILIPS drivers. There is wide range of indoor applications for offices, shops, schools, conference rooms, and more. Suitable for replacement of standard luminaires with fluorescent lamps.

Product description:


- LED module efficiency: > 110lm /W
- Luminous flux (Lm) can change in a different range other than the indicated- on request
- High color rendering CRI> 80
- CCT: 3000K and 4000K, 6500K - on request;
- Dimmable;
- Protection IP21;
- Long life: 50000h;
- Body: aluminum;
- Diffuser: PMMA;
- UGR < 19;
- Warranty: FPH - 5 years;

FPH LED PANEL

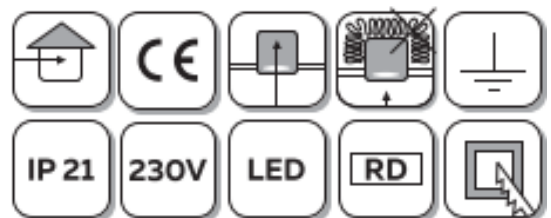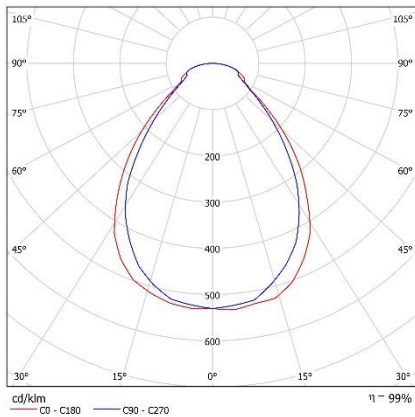

5 | warranty
YEARS

FPH LED PANEL

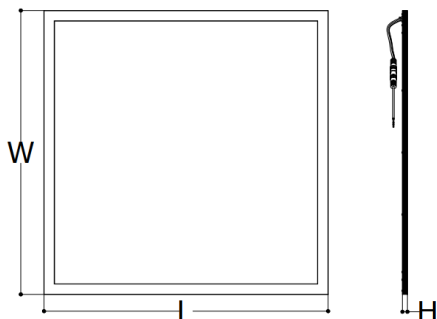

DIMENSIONS:

FPH6060 595x595x10,5mm

FPH30120 295x1195x10,5mm

FPH60120 595x1195x10,5mm

CONFIGURATION REF.= A+B+C

example: FPH6060 28E830-W-TD

A FPH LED PANEL

REF.No	Dimensions L/W/H	Power, W	Luminous flux, Lm	Color temperature K	Efficiency Lm/W	CRI	LED module and driver
FPH6060 28E830	595x595x10,5mm	24 W	2800 Lm	3000 K	117 Lm/W	>80	PHILIPS
FPH6060 28E840	595x595x10,5mm	22 W	2800 Lm	4000 K	127 Lm/W	>80	PHILIPS
FPH6060 35E830	595x595x10,5mm	31 W	3560 Lm	3000 K	115 Lm/W	>80	PHILIPS
FPH6060 35E840	595x595x10,5mm	30 W	3560 Lm	4000 K	119 Lm/W	>80	PHILIPS
FPH6060 39E830	595x595x10,5mm	36 W	3950 Lm	3000 K	110 Lm/W	>80	PHILIPS
FPH6060 39E840	595x595x10,5mm	33 W	3950 Lm	4000 K	120 Lm/W	>80	PHILIPS
FPH30120 28E830	295x1195x10,5mm	24 W	2800 Lm	3000 K	117 Lm/W	>80	PHILIPS
FPH30120 28E840	295x1195x10,5mm	24 W	2800 Lm	4000 K	127 Lm/W	>80	PHILIPS
FPH30120 35E830	295x1195x10,5mm	31 W	3560 Lm	3000 K	115 Lm/W	>80	PHILIPS
FPH30120 35E840	295x1195x10,5mm	30 W	3560 Lm	4000 K	119 Lm/W	>80	PHILIPS
FPH60120 50E830	595x1195x10,5mm	44 W	5000 Lm	3000 K	112 Lm/W	>80	PHILIPS
FPH60120 54E840	595x1195x10,5mm	44 W	5350 Lm	4000 K	121 Lm/W	>80	PHILIPS

B COLORS

WHITE

.W

C DIMMABLE

DALI

.TD